



The **PULZ RS-CW118 Classic** low frequency system has been specifically developed for playback of digital audio soundtracks in prestigious cinema theatres. The system is capable of high power output, low distortion and smooth response to the lowest audible frequencies.

The 18-inch driver is loaded in a direct radiator, bass-reflex enclosure. It has a 3-inch high temperature voice-coil for high power handling and reduced power compression. The specially coated cone is weather resistant and can withstand extremely severe climatic conditions. The large port area reduces turbulence at full power output and low frequencies.

The **RS-CW118** is recommended where no compromise low frequency effects and long-term reliability are desired.

## RS-CW118 Classic


High Performance Cinema Subwoofer System



the classic series

technical technical

Frequency response	30Hz to 100Hz $\pm$ 3dB
Power handling	400 Watts AES continuous programme
Sensitivity	99dB/1W/1m
Maximum SPL	121dB continuous
Nominal impedance	8
Low frequency driver	18" (464mm) long-throw weather resistant
Enclosure	220.0 litres, Bass reflex type
Connectors	Binding screw post, 6.0 sq. mm
Dimensions	H 921mm x W 729mm x D 454mm
Cabinet finish	Black polyester paint textured
Weight	60.00 Kg
Packed weight	70.00 Kg

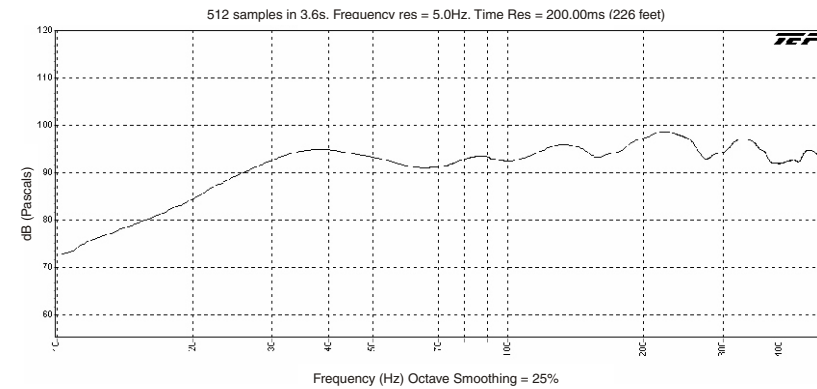

## features

- high dynamic SPL
- low harmonic distortion
- large vented pole magnet - heat extracting design
- high-temperature stabilised 3" copper voice coil
- high strength cellulose fibre, resin impregnated cone

RS-CW118 high performance cinema subwoofer system